

# SPECIFICATIONS

## MEASUREMENT PERFORMANCE

	Range	Resolution	Accuracy
0.01 Cell Contacting Conductivity	0-300 $\mu\text{S/cm}$	0.01 $\mu\text{S/cm}$ , 0.0001 mS/cm, 0.001 mS/m, 0.0001 S/m, 0.01 ppm	$\pm 1\%$ of reading
0.1 Cell Contacting Conductivity	0-3,000 $\mu\text{S/cm}$	0.1 $\mu\text{S/cm}$ , 0.0001 mS/cm, 0.01 mS/m, 0.0001 S/m, 0.1 ppm	$\pm 1\%$ of reading
1.0 Cell Contacting Conductivity	0-30,000 $\mu\text{S/cm}$	1 $\mu\text{S/cm}$ , 0.001 mS/cm, 0.1 mS/m, 0.0001 S/m, 1 ppm	$\pm 1\%$ of reading
10.0 Cell Contacting Conductivity	0-300,000 $\mu\text{S/cm}$	10 $\mu\text{S/cm}$ , 0.01 mS/cm, 1 mS/m, 0.001 S/m, 10 ppm	$\pm 1\%$ of reading
pH	-2 to 16 pH units	0.01 pH units	$\pm 0.01\%$ of reading
ORP/Ion Selective Electrode	-1500 to 1500 mV	0.1 mV	$\pm 1$ mV
Disinfection Sensors	-2000 to 1500 mV	0.1 mV	$\pm 1$ mV
	0 - 2 ppm to 0 - 20,000 ppm	Varies with range and slope	Varies with range and slope
Electrodeless Conductivity	500 - 12,000 $\mu\text{S/cm}$	1 $\mu\text{S/cm}$ , 0.01 mS/cm, 0.1 mS/m, 0.001 S/m, 1 ppm	$\pm 1\%$ of reading
	3,000-40,000 $\mu\text{S/cm}$	1 $\mu\text{S/cm}$ , 0.01 mS/cm, 0.1 mS/m, 0.001 S/m, 1 ppm	$\pm 1\%$ of reading
	10,000-150,000 $\mu\text{S/cm}$	10 $\mu\text{S/cm}$ , 0.1 mS/cm, 1 mS/m, 0.01 S/m, 10 ppm	$\pm 1\%$ of reading
	50,000-500,000 $\mu\text{S/cm}$	10 $\mu\text{S/cm}$ , 0.1 mS/cm, 1 mS/m, 0.01 S/m, 10 ppm	$\pm 1\%$ of reading
	200,000-2,000,000 $\mu\text{S/cm}$	100 $\mu\text{S/cm}$ , 0.1 mS/cm, 1 mS/m, 0.1 S/m, 100 ppm	$\pm 1\%$ of reading
Temperature	23 to 500°F (-5 to 260°C)	0.1°F (0.1°C)	$\pm 1\%$ of reading within range



Temperature °C	Range Multiplier %
0	181.3
10	139.9
15	124.2
20	111.1
25	100.0
30	90.6
35	82.5
40	75.5
50	64.3
60	55.6
70	48.9

Temperature °C	Range Multiplier %
80	43.5
90	39.2
100	35.7
110	32.8
120	30.4
130	28.5
140	26.9
150	25.5
160	24.4
170	23.6
180	22.9

**Note:** Conductivity ranges above apply at 25°C. At higher temperatures, the range is reduced per the range multiplier chart.



## DIMENSIONS

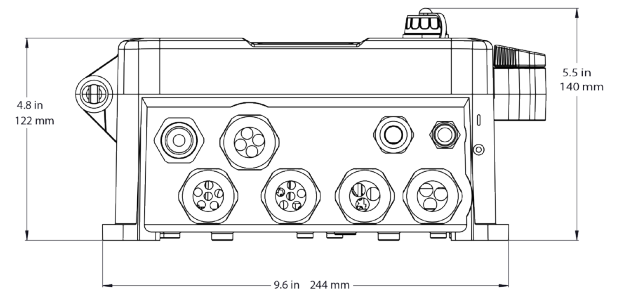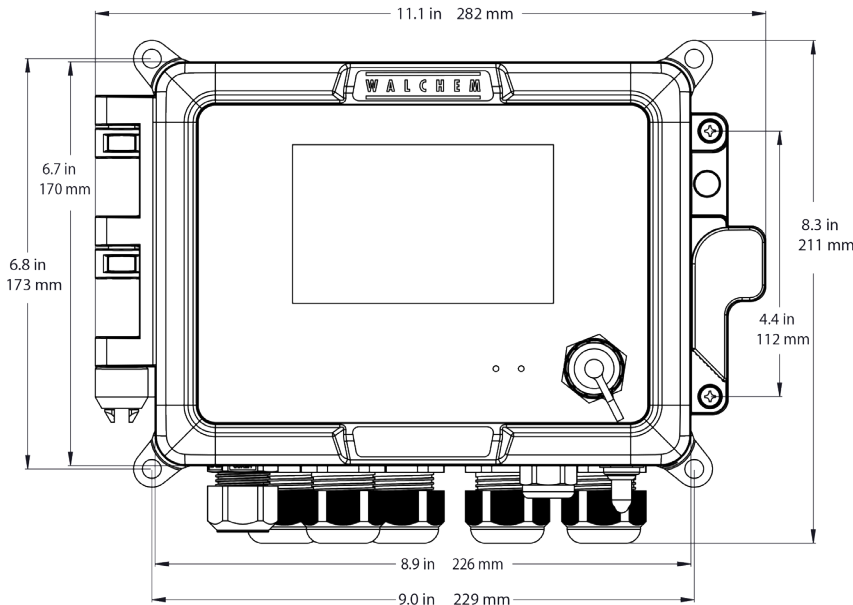

# SPECIFICATIONS

## INPUTS

### Power

100 to 240 VAC +/- 10%, 50 or 60 Hz, 7 A maximum  
Fuse: 6.3 A

### Sensor Input Signals

(0, 1 or 2 depending on model code)

Contacting Conductivity: 0.01, 0.1, 1.0, or 10.0 cell constant, or Electrodeless Conductivity (not available on the combination sensor/analog input card) or Disinfection or Amplified pH, ORP, or Ion Selective Electrode which requires a preamplified signal. ±5VDC power available for external preamps. Walchem WEL or WDS series pH/ORP sensors recommended.

Each sensor input card contains a temperature input.

Temperature: 100 or 1000 ohm RTD, 10K or 100K Thermistor

### Analog (4-20 mA) Sensor Input

(0, 1, 2 or 4 depending on model code)

2-wire loop powered and self-powered transmitters supported

3-wire and 4-wire transmitters supported

Each dual sensor input board has two channels:

Channel 1, 130 ohm input resistance and Channel 2, 280 ohm input resistance. The combination input board has one channel, 280 ohm input resistance.

Available Power: One independently isolated 24 VDC ±15% supply per channel. 2.0 W (83 mA at 24 VDC) maximum for each channel. Total power consumption for all channels is 2 to 8 W depending on the maximum ambient temperature:

*(See Power Budget graph on pg 5)*

### Digital Input Signals (6):

State-Type Digital Inputs

Electrical: Optically isolated and providing an electrically isolated 9V power with a nominal 2.3mA current when the digital input switch is closed.

Typical response time: < 2 seconds.

Devices supported: Any isolated dry contact (i.e. relay, reed switch)

Types: Interlock

### Low Speed Counter-Type Digital Inputs

Electrical: Optically isolated and providing an electrically isolated 9V power with a nominal 2.3mA current when the digital input switch is closed, 0-10 Hz, 50 msec minimum width. Devices supported: Any device with isolated open drain, open collector, transistor or reed switch.

Types: Contacting Flowmeter

### High Speed Counter-Type Digital Inputs

Electrical: Optically isolated and providing an electrically isolated 9V power with a nominal 2.3mA current when the digital input switch is closed, 0-500 Hz, 1.00 msec minimum width. Devices supported: Any device with isolated open drain, open collector, transistor or reed switch.

Types: Paddlewheel Flowmeter

## OUTPUTS

### Powered Mechanical Relays

(0 or 6 model code dependent)

Pre-powered on circuit board switching line voltage

All relays are fused together as one group, total current must not exceed 6A (resistive), 1/8 HP (93W)

### Dry Contact Mechanical Relays

(0, 2 or 4 model code dependent)

6 A (resistive), 1/8 HP (93W)

Dry contact relays are not fuse protected.

### Pulse Outputs (0, 2 or 4 model code dependent)

Opto-isolated, solid-state relay, 200mA, 40V DC

VLOWMAX = 0.05V @ 18mA

### 4 - 20 mA (0 or 2 model code dependent)

Internally powered, fully isolated

600 Ohm max resistive load

Resolution 0.0015% of span

Accuracy ± 0.5% of reading

### Ethernet

10/100 802.3-2005

Auto MDIX support

Auto Negotiation

### USB

Connector: Type A receptacle

Speed: High speed (480 Mbit)

Power: 0.5 A maximum

## AGENCY CERTIFICATIONS

**Safety:** UL 61010-1:2012 3rd Ed + Rev:2019  
CSA C22.2 No. 61010-1:2012 3rd Ed. + U1; U2  
IEC 61010-1:2010 3rd Ed. + A1:2016  
EN 61010-1:2010 3rd Ed. + A1:2019  
BS EN 61010-1:2010 + A1:2019

**EMC:** IEC 61326-1:2020  
EN 61326-1:2013  
BS EN 61326-1:2013

Note: For EN 61000-4-3 Radiated RF Immunity, the controller meets Performance Criteria B.  
\*Class A equipment: Equipment suitable for use in establishments other than domestic, and those directly connected to a low voltage 100-240 VAC) power supply network which supplies buildings used for domestic purposes.


## MECHANICAL (CONTROLLER)

<b>Enclosure Material</b>	Polycarbonate
<b>Enclosure Rating</b>	Certified to UL 50 and UL 50E Type 4X. IEC 60529 meets IP66
<b>Environmental Conditions</b>	Can be installed indoors and outdoors. Suitable for wet location
<b>Dimensions</b>	11.1" x 8.3" x 5.5" (282 mm x 211 mm x 140 mm)
<b>Display</b>	5" TFT color display, 800 x 480 pixels with capacitive touchscreen
<b>Operating Ambient Temp</b>	-4 to 131°F (-20 to 55°C)
<b>Storage Temperature</b>	-4 to 176°F (-20 to 80°C)
<b>Humidity</b>	10 to 90% non-condensing
<b>Pollution Degree</b>	2
<b>Overvoltage Category</b>	II
<b>Altitude</b>	2000 m (6560 ft) maximum


# SPECIFICATIONS

## MECHANICAL (SENSORS) (\*see graph)

Sensor	Pressure	Temperature	Materials	Process Connections
Electrodeless Conductivity	0-150 psi (0-10 bar)*	CPVC: 32-158°F (0 to 70°C)* PEEK: 32-190°F (0 to 88°C)	CPVC, FKM in-line o-ring PEEK, 316 SS in-line Adapter	1" NPTM submersion 2" NPTM in-line adapter
pH	0-100 psi (0-7 bar)*	50-158°F (10-70°C)*	CPVC, Glass, FKM o-rings, HDPE, Titanium Rod, glass-filled PP tee	1" NPTM submersion 3/4" NPTF in-line tee
ORP	0-100 psi (0-7 bar)*	32-158°F (0-70°C)*		
Contacting Conductivity (Condensate)	0-200 psi (0-14 bar)	32-248°F (0-120°C)	316SS, PEEK	3/4" NPTM
Contacting Conductivity Graphite (Cooling Tower)	0-150 psi (0-10 bar)*	32-158°F (0-70°C)*	Graphite, Glass-filled PP, FKM o-ring	3/4" NPTM
Contacting Conductivity SS (Cooling Tower)	0-150 psi (0-10 bar)*	32-158°F (0-70°C)*	316SS, Glass-filled PP, FKM o-ring	3/4" NPTM
Contacting Conductivity (Boiler)	0-250 psi (0-17 bar)	32-401°F (0-205°C)	316SS, PEEK	3/4" NPTM
Contacting Conductivity (High Pressure Tower)	0-300 psi (0-21 bar)*	32-158°F (0-70°C)*	316SS, PEEK	3/4" NPTM
pH (High Pressure)	0-300 psi (0-21 bar)*	32-275°F (0-135°C)*	Glass, Polymer, PTFE, 316SS, FKM	1/2" NPTM gland
ORP (High Pressure)	0-300 psi (0-21 bar)*	32-275°F (0-135°C)*	Platinum, Polymer, PTFE, 316SS, FKM	1/2" NPTM gland
Free Chlorine/Bromine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)	PVC, Polycarbonate, Silicone Rubber, SS, PEEK, FKM, Isoplast	1/4" NPTF Inlet 3/4" NPTF Outlet
Extended pH Range Free Chlorine/Bromine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Total Chlorine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Chlorine Dioxide	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Ozone	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Peracetic Acid	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Hydrogen Peroxide	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Flow Switch Manifold	0-150 psi (0-10 bar) up to 100°F (38°C)* 0-50 psi (0-3 bar) at 140°F (60°C)	32-140°F (0-60°C)*	GFRPP, PVC, FKM, Isoplast	3/4" NPTF
Flow Switch Manifold (High Pressure)	0-300 psi (0-21 bar)*	32-158°F (0-70°C)*	Carbon Steel, Brass, 316SS, FKM	3/4" NPTF
Turner Little Dipper 2	0-100 psi (0-7 bar)*	32-122°F (0-50°C)*	PVC, GRFPP, FKM	3/4" NPTF in-line tee
Pyxis ST-500, 588, 590	0-100 psi (0-7 bar)*	40-104°F (4-40°C)*	CPVC, Quartz, FKM	3/4" NPTF in-line tee
Pyxis ST-765SS	0-100 psi (0-7 bar)	40-120°F (4-49°C)	304SS, 316SS, Glass, Gold, Platinum, CPVC, PTFE	See FR-50 or FR-300+
Pyxis FR-50	7.25-30 psi (0.5-2 bar)	40-120°F (4-49°C)	CPVC, PVC, PE, PMMA, 304SS, POM, NBR	1/4" OD PE tubing Inlet 2 x 20 mm ID hose barb Outlet
Pyxis FR-300+	7.25-30 psi (0.5-2 bar)	40-120°F (4-49°C)	PVC, POM, ABS, 316SS, PEEK, PET, NBR	3/8" OD tubing fittings

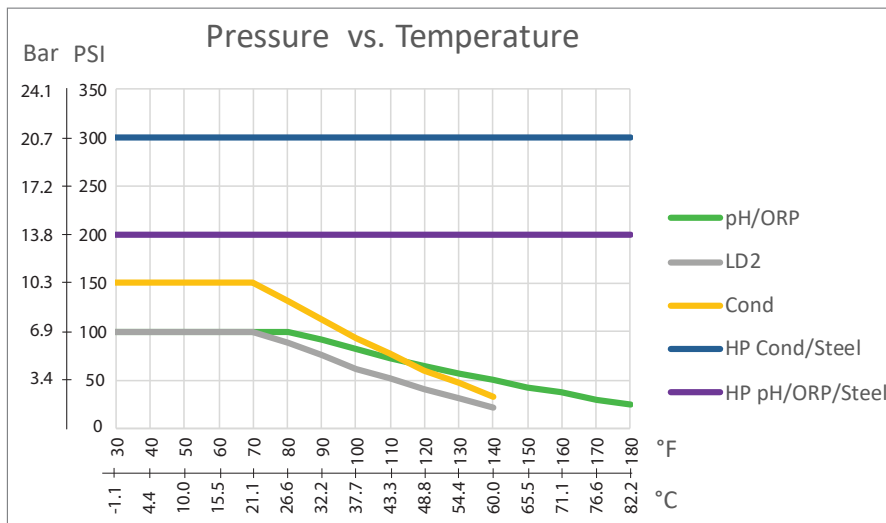

# SPECIFICATIONS

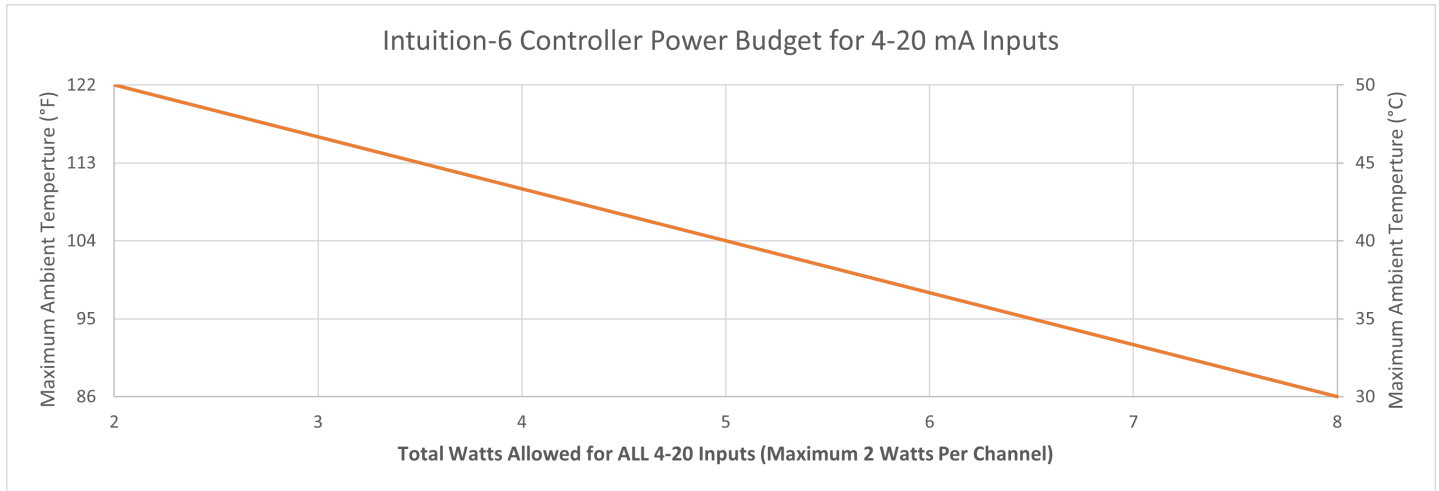

## ORDERING INFORMATION

**WBL6** (Boiler Controller)    **WCT6** (Cooling Tower Controller)    **WDS6** (Disinfectant Controller)  
**WPH6** (pH Controller)    **WCN6** (Conductivity Controller)    **WPD6** (Pyxis Oxidizer + pH Controller)

**WBL6**  
**WCT6**  
**WPH6**  
**WDS6**  
**WCN6**  
**WPD6**

RELAYS/WIRING	POWER CORD	INPUT BOARD	ANALOG OUTPUTS	ETHERNET	-	SENSOR MOUNTING	SENSORS
A00	P	AA	A	M		P	BDNN

RELAYS/WIRING	
000	6 powered relays
100	2 powered 4 dry relays
200	2 opto 4 dry relays
400	4 opto 2 dry relays
A00	6 powered relays with USA pigtailed prewired
B00	2 powered relays with USA pigtailed prewired, 4 dry relays
C00	2 opto relays with 20 ft. pulse cables, 4 dry relays
D00	4 opto relays with 20 ft. pulse cables, 2 dry relays
POWER CORD	
B	Brazil power cord
D	DIN power cord
H	Hardwired - No power cord
P	USA power cord
INPUT BOARD (Choose 2 in alphabetical order)	
A	One sensor input board
B	One dual analog input board
C	One combination sensor/analog input board
N	No sensor input board
ANALOG OUTPUTS	
N	No analog outputs
A	One dual isolated analog output card
ETHERNET	
N	No Ethernet
E	Ethernet board
M	Ethernet board with Modbus TCP + BACnet

WCT, WPH SENSOR MOUNTING	
<b>N</b>	No Flow Switch, No mounting hardware, No Sensors
<b>S</b>	No Flow Switch, Submersion Sensors, 20 foot cables
<b>I</b>	No Flow Switch, Inline Sensors, 20 foot cables
<b>L</b>	Loose Flow Switch Manifold, 20 foot cables, Low Pressure
<b>P</b>	Flow Switch Manifold on Panel, 3 foot cables, Low Pressure
<b>F</b>	Loose Flow Switch Manifold, 4 foot cable, High Pressure
<b>H</b>	Flow Switch Manifold on Panel, 4 foot cables, High Pressure
WDS SENSOR MOUNTING	
<b>N</b>	No Flow Switch, No mounting hardware, No Sensors
<b>I</b>	No Flow Switch, Inline Sensors, 20 foot cables
<b>L</b>	Loose Flow Switch Manifold, 20 foot cables, Low Pressure
<b>P</b>	Flow Switch Manifold on Panel, 3 foot cables, Low Pressure
WCN SENSOR MOUNTING	
<b>N</b>	No Flow Switch, No mounting hardware, No Sensors
<b>S</b>	No Flow Switch, Submersion Sensors
<b>I</b>	No Flow Switch, Inline Sensors
WBL SENSOR MOUNTING	
NOT APPLICABLE SEE SENSOR OPTIONS	
WPD SENSOR MOUNTING	
<b>N</b>	No Flow Switch, No mounting hardware, No Sensors
<b>C</b>	Clean water reservoir on a panel
<b>D</b>	Industrial water 115 V self-cleaning flow reservoir on a panel
<b>E</b>	Industrial water 230 V self-cleaning flow reservoir on a panel

# ORDERING INFORMATION

**WBL6** (Boiler Controller)    **WCT6** (Cooling Tower Controller)    **WDS6** (Disinfectant Controller)  
**WPH6** (pH Controller)    **WCN6** (Conductivity Controller)    **WPD6** (Pyxis Oxidizer + pH Controller)

**WBL6**  
**WCT6**  
**WPH6**  
**WDS6**  
**WCN6**  
**WPD6**

RELAYS/WIRING	POWER CORD	INPUT BOARD	ANALOG OUTPUTS	ETHERNET	SENSOR MOUNTING	SENSORS
---------------	------------	-------------	----------------	----------	-----------------	---------

<b>WPH SENSORS (Choose 4 in alphabetical order)</b>	
<b>A</b>	External pH/ORP Preamplifier, no sensor*
<b>B</b>	Flat surface WEL pH, with Pt1000 ATC
<b>C</b>	Flat surface WEL pH, No ATC
<b>D</b>	Rod Style WEL ORP
<b>E</b>	Flat surface WEL ORP
<b>F</b>	Flat surface WEL pH, 4-20 mA
<b>G</b>	Rod Style WEL ORP, 4-20 mA
<b>H</b>	Flat surface WEL ORP, 4-20 mA
<b>N</b>	No Sensor
<b>X</b>	Dual low pressure manifold**
* Order 102029 or 102963 electrodes separately. These sensors are allowed with high pressure manifold sensor mounting	
**Order WEL electrode(s) and Preamplifier housing(s) separately, for L or P mounting style only	
<b>WCT SENSORS (Choose 4 in alphabetical order, except N last)</b>	
<b>A</b>	Graphite contacting conductivity
<b>B</b>	316SS contacting conductivity
<b>C</b>	Electrodeless conductivity***
<b>D</b>	High pressure contacting conductivity*
<b>E</b>	Graphite contacting conductivity for Makeup water, threaded mounting adapter
<b>F</b>	Flat surface WEL pH, No ATC
<b>G</b>	High pressure pH, No ATC*
<b>H</b>	Rod Style WEL ORP
<b>I</b>	Flat surface WEL ORP
<b>J</b>	High pressure ORP*
<b>K</b>	Free Chlorine, 20 ppm, extended pH range membrane-style**
<b>L</b>	Chlorine Dioxide 0-20 ppm membrane-style**
<b>M</b>	Little Dipper 2, 0-200 ppb PTSA** (Analog)
<b>N</b>	No Sensor
<b>P</b>	Pyxis PTSA** (Analog)
<b>S</b>	Disinfection, membrane-style, No Sensor
<b>T</b>	Pyxis Tagged Polymer (Analog)
<b>U</b>	Pyxis PTSA + Tagged Polymer (2 Analog)
<b>V</b>	Flat surface WEL pH, 4-20 mA (Analog)
<b>W</b>	Rod Style WEL ORP, 4-20 mA (Analog)
<b>X</b>	Flat surface WEL ORP, 4-20 mA (Analog)
* If a high pressure manifold for H is selected, only Hi P Sensors and Makeup available.	
** Dipper, Pyxis, Chlorine, ClO2, Disinfection Sensors NOT available with Submersion mounting.	
***Requires "A" Sensor Input, will not work with the "C" combination board	

<b>WDS SENSORS (Choose 2 in alphabetical order)</b>	
<b>A</b>	Free chlorine, 0-20 ppm
<b>B</b>	ClO2, 0-20 ppm
<b>C</b>	Ozone, 0-20 ppm
<b>D</b>	PAA, 0-2000 ppm
<b>E</b>	Extended pH range free chlorine, 0-20 ppm
<b>F</b>	Total chlorine, 0-20 ppm
<b>G</b>	Peroxide, 0-2000 ppm
<b>H</b>	Stabilized Bromine, 0-20 ppm
<b>I</b>	Chlorite, 0-2 ppm
<b>J</b>	Chlorine, for use in absence of chlorine, 0-2 ppm
<b>N</b>	No Sensor
<b>X</b>	DIS membrane-style manifold plus pH/ORP/cooling tower conductivity tee*
*Order disinfection sensor and WEL electrode and Preamplifier housing or cooling tower conductivity sensor separately, for L or P mounting style only	
<b>WCN SENSORS (Choose 2 in alphabetical order)</b>	
<b>A</b>	PEEK electrodeless conductivity, 20 ft cable
<b>B</b>	CPVC electrodeless conductivity, 20 ft cable
<b>C</b>	Contacting conductivity, 1.0 cell constant, 100 psi, 10 ft cable
<b>D</b>	Contacting conductivity, 0.1 cell constant, 100 psi, 10 ft cable
<b>E</b>	Contacting conductivity, 10.0 cell constant, 100 psi, 10 ft cable
<b>F</b>	Contacting conductivity, 0.01 cell constant, 100 psi, 10 ft cable
<b>G</b>	Contacting conductivity, 1.0 cell constant, 200 psi, 10 ft cable
<b>H</b>	Contacting conductivity, 0.1 cell constant, 200 psi, 10 ft cable
<b>I</b>	Contacting conductivity, 10.0 cell constant, 200 psi, 10 ft cable
<b>J</b>	Contacting conductivity, 0.01 cell constant, 200 psi, 10 ft cable
<b>N</b>	No Sensor
*Requires "A" Sensor Input, will not work with the "C" combination board	
<b>WBL SENSORS (Choose 2 in alphabetical order)</b>	
<b>A</b>	Boiler Sensor with ATC, 250 psi, 1.0 cell constant, 20 ft. cable
<b>B</b>	Boiler Sensor without ATC, 250 psi, 1.0 cell constant, 20 ft. cable
<b>C</b>	Condensate Sensor with ATC, 200 psi, 0.1 cell constant, 10 ft. cable
<b>D</b>	Boiler Sensor with ATC, 250 psi, 10 cell constant, 20 ft. cable
<b>N</b>	No Sensor
<b>WPD SENSORS (Choose 1)</b>	
<b>A</b>	Free Chlorine (2 Analog)
<b>B</b>	Chlorine Dioxide (2 Analog)
<b>N</b>	No Sensor

**NOTE: All sensors require sensor input type unless otherwise noted as Analog**